


## PROSYS 150M frame

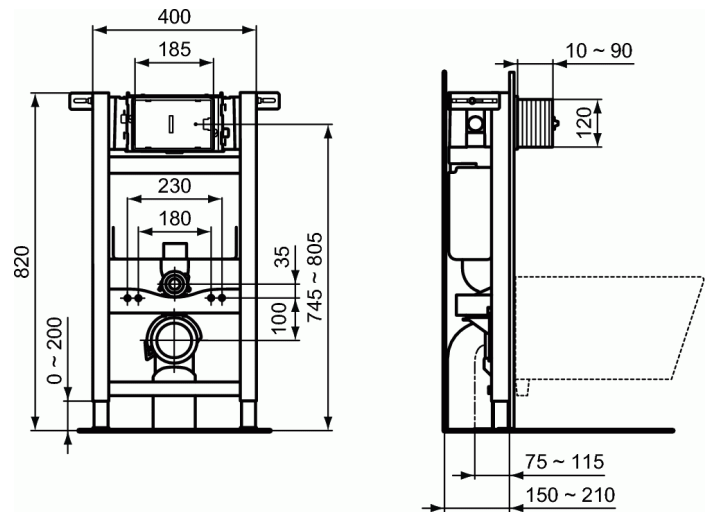

### 150M frame

Suitable to be used with wall mounted WC bowls

- Only 82 cm height - the perfect frame for lower installation (for example below the window)
- For installation in front of solid wall or between two light plasterboard walls according to manual
- Frame tested for a load of 400 kg
- Frame corrosion resistant & resistant to scratches
- Easy and quick installation
- Directional outlet elbow, adjustable in depth
- Height adjustable from 0 to 200 mm, quick adjustable height legs with brakes allowing one person installation
- 150 mm minimum thick
- Built-in tank with front or top mechanical actuation, possible pneumatic or electronic transforming by kits available as separate order
- Dual flush, pre-set for 6/3 L, simple adjustment to reduce full flush from 6 to 4,5 L
- Reservoir in polypropylene (PP) very resistant and unalterable to thermal stresses, supplied with anti-condensation lining
- SmartValve (saves up to 9 litres of water per day), CE marking EN 14055 CL1, silent valve according to the NF standard category Class I, tank 150 mm thickness, 3 water supply connections

Accessories Included:

- Toilet bowl fixing hardware
- Frame fastening materials
- Inlet and outlet WC bowl connection
- Outlet bend and Ø90/110 mm adaptor
- Bowl rubber seal Ø45 mm
- Protective box
- G ½" stop valve

### FINISHES\*



\* 67 = Neutral

## PROSYS 150M frame



For assembly with control plates (separate order):

Mechanical control plates: Oleas™ (in case of frontal actuation)  
M1, M2, M3, M4; Solea™ M1, M2; Septa Pro™ M1,M2

Mechanical control plates: Oleas™ (in case of top actuation)  
M1, M2, M3, M4 (in combination with conversation kit for TOP  
actuation Oleas™)

Conversation kit for actuation from TOP for mechanical control  
plates Oleas™ M1, M2, M3, M4 R017667

OR

Mechanical control plates (in combination with SmartFlush kit  
R018667): Oleas™ SmartFlush M1, M2

SmartFlush kit (in combination with Mechanical control plates  
Oleas™ SmartFlush M1, M2) R018667

OR

Pneumatic control plates (in combination with Pneumatic  
conversation kit R009267): Oleas™ P1, P2,P3 Solea™ P1,P2;  
Septa Pro™ P1, P2, P3, P4, Floor; Septa Pro™ XS P1,P2

Pneumatic conversation kit (in combination with pneumatic  
control plates) R009267

Optionals:

- Acoustic insulation for wall-hung pan and bidet (R017467)
- Noise insulation kit - frame to floor (Avoids direct contact  
between the frame and the floor) (R010667)